
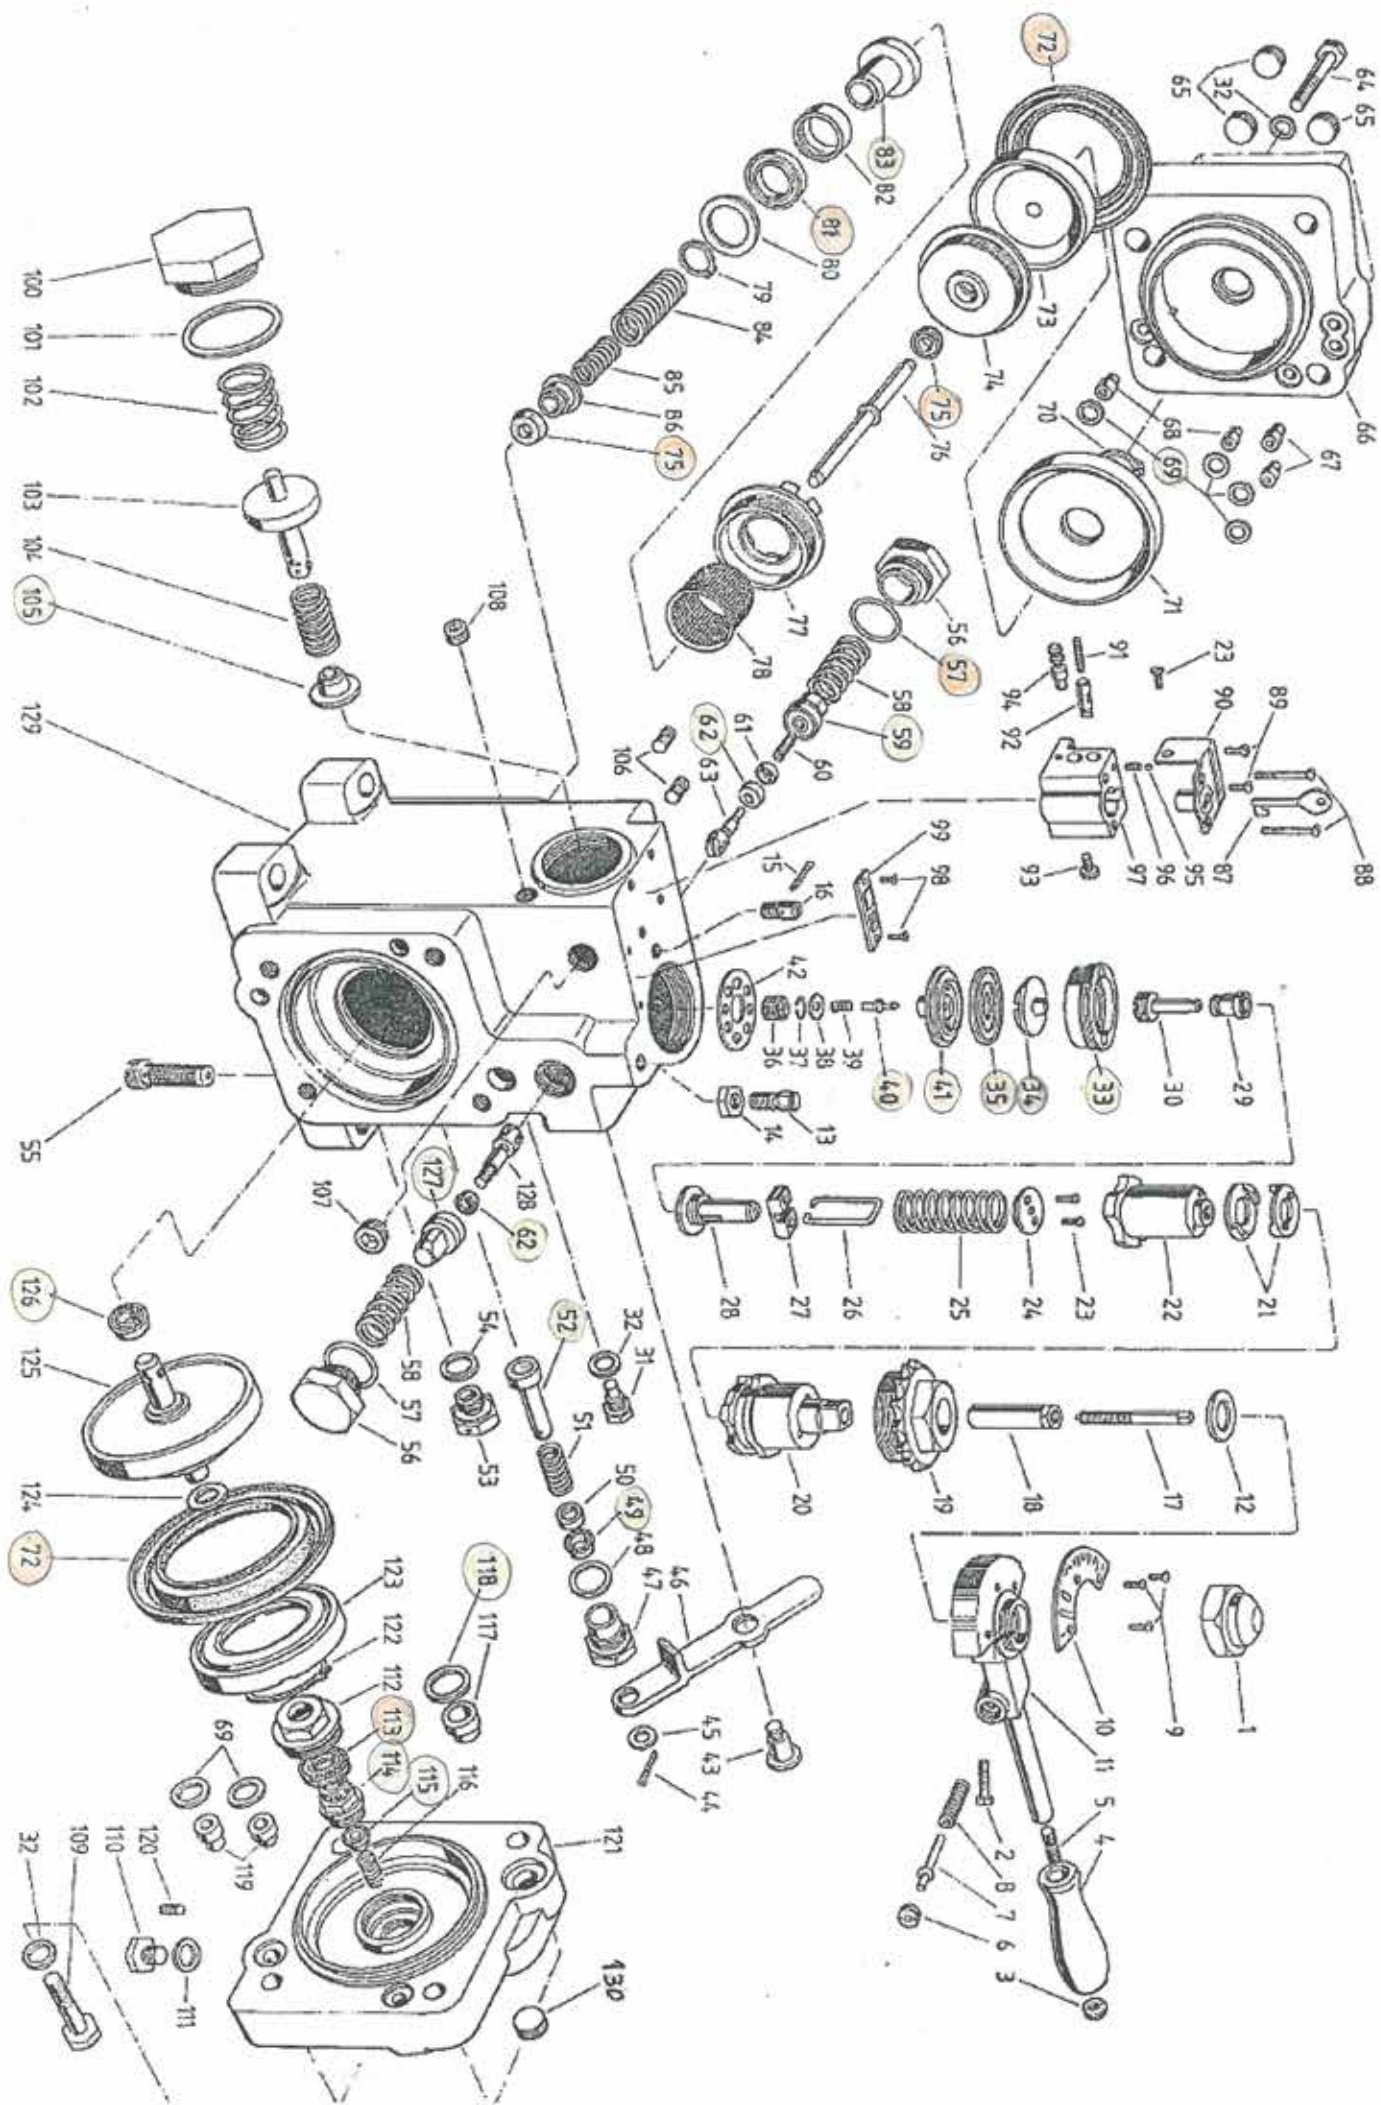
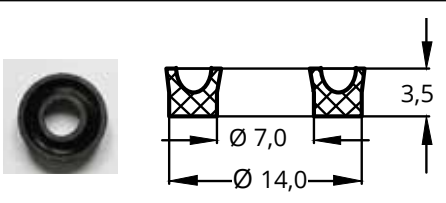
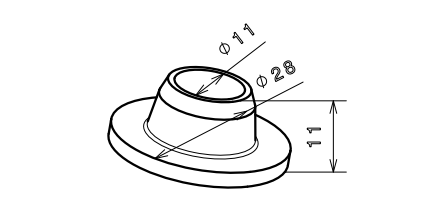
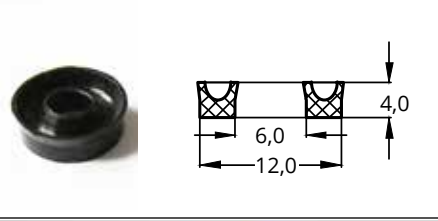
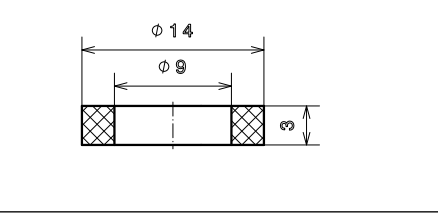
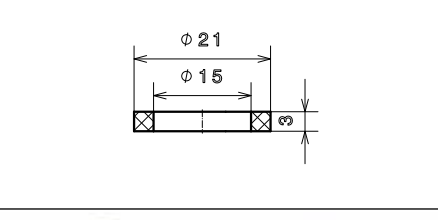
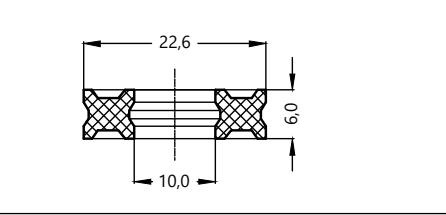
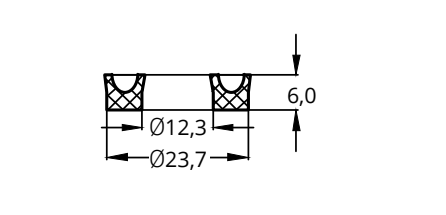
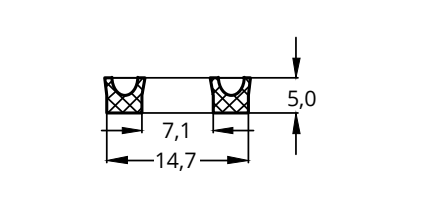
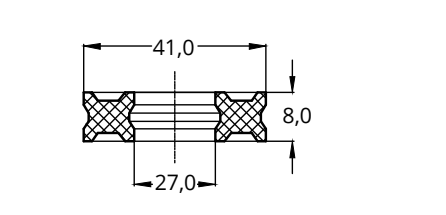
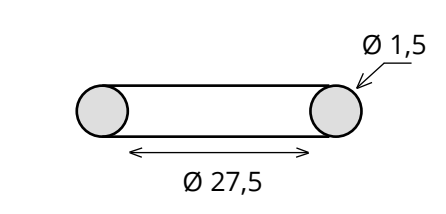


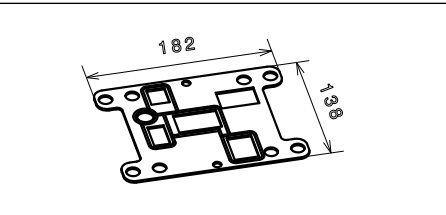

FK 72 - Automatic brake valve - KD2 - for locomotive

SCHEME POSITION	drawing/picture	name/ dimensions	N.Pices/set	VULCOM CODE
FK 72 - 14	 A technical drawing of a grooved gasket showing a cross-section with a central hole of diameter 7.0 mm and an outer diameter of 14.0 mm. The height of the gasket is 3.5 mm. A photograph of the black rubber gasket is shown to the left of the drawing.	Grooved gasket Ø7 x Ø14 x 3,5 mm	1	VLC 04 - 012
33	 A photograph of a brass screw membrane, which is a ring with a central hole and two small protrusions on opposite sides.	Screw membrane M 65 x 2 int. Ø44 / Ø48 h= 20 mm	1	VLC 08 - 006
FK 72 - 16				
34	 Two photographs of brass disk membranes. One shows the top view with a central hole, and the other shows the side view, highlighting its thickness.	Disk membrane Ø10 x Ø46 X 16 mm	1	VLC 08 - 007
FK 72 - 17				
35	 A photograph of a black, circular membrane with a central hole.	Membrane Ø24,5 x Ø58 x 6,8 mm	1	VLC 05 - 013
FK 72 - 18				
41	 Two photographs of brass valve bodies. One shows the top view, and the other shows the side view with a central threaded hole.	Valve body Ø17 x Ø62 x 22 mm	1	VLC 08 - 009
FK 72 - 19				
40	 A photograph of a brass valve double seat, which is a T-shaped component with a pointed end.	Valve double seat Ø4 x Ø9 x 27,5 mm	1	VLC 08 - 008
FK 72 - 24				
52	 Three photographs of brass valve stems of different lengths and diameters.	Valve stem Ø8 C11x Ø16 C11 x 45 mm	1	VLC 06 - 008
FK 72 - 27				
49	 Two photographs of black grooved gaskets, showing both the top and side views.	Grooved gasket Ø8 x Ø16 x 4 mm	1	VLC 04 - 015
FK 72 - 29				

SCHEME POSITION	drawing/picture	name/ dimensiuns	N.Pices/set	VULCOM CODE
103/83		garnitura autoregulator D2 Ø24 x Ø41 x 5,5 mm	2	VLC 06 - 011
FK 72 - 51/FK72-50				
105		Sealing cuff Ø28 x Ø11 x 11 mm	1	VLC 02 - 005
FK 72 - 56				
127		Valve plate metal - rubber with thread Ø15,5 x Ø22 x 16 mm	1	VLC 06 - 004
FK 72 - 62				
62/128		Grooved gasket Ø6 x Ø12 x 4 mm	2	VLC 04 - 013
FK 72 - 66				
59		Valve body - without thread Ø15,5 x Ø22 x 16 mm	1	VLC 06 - 003
FK 72 - 76				
69		Gasket Ø14 x Ø9 x 3 mm	6	VLC 02 - 018
FK 72 - 79				
118		Sealing cuff Ø15 x Ø21 x 3 mm	1	VLC 02 - 019
FK 72 - 85				
73		Bellows Ø72x Ø110 x14 mm	1	VLC 05 - 004
FK 72 - 88				

SCHEME POSITION	drawing/picture	name/ dimensiuns	N.Pices/set	VULCOM CODE
114 FK 72 - 93		Screw valve Ø16 x Ø32 x 24 mm	1	VLC 08 - 025
115 FK 72 - 94		Valve body Ø14 x Ø20 C11 x 8 mm	1	VLC 06 - 009
113 FK 72 - 97		Double grooved X gasket Ø10 x Ø22,6 x 6 mm	1	VLC 04 - 002
126 FK 72 - 99		Grooved gasket Ø12,3 x Ø23,7 x 6 mm	1	VLC 04 - 011
75 FK 72 - 103		Grooved gasket Ø7,1 x Ø14,7 x 5 mm	2	VLC 04 - 014
81 FK 72 - 107		Double grooved gasket Ø27 x Ø41 x 8 mm	1	VLC 04 - 001
57 FK 72 - 139		O ring Ø27,5 x 1,5 mm	2	VLC 03 - 019
FK 72 - 163		Gasket Ø182 x Ø138 x 2 mm	1	VLC 02 - 002